DRIX1333LRQ

DDR3-1333, PC3L-10600L, ECC, 1.35V, 240-pin LRDIMMs

Products in Family
DRIX1333LRQ/16GB (1 x 16GB 4Rx4 LRDIMM)
DRIX1333LRQ/32GB (1 x 32GB 4Rx4 LRDIMM)

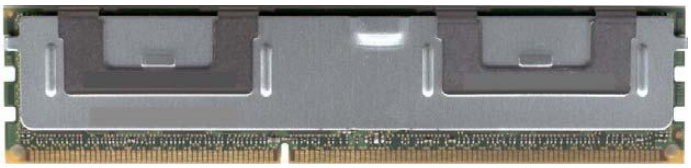

Features	Description
240-pin JEDEC-compliant DIMMs 133.35 mm wide by 30 mm high (1.181” x 5.25”) Data Transfer Rate: 10.6 Gigabytes/sec Operating Voltage: 1.35V (1.28V~1.45V) Backward compatible: 1.5V(1.425V~1.575V) Fully RoHS Compliant Thermal Sensor Heat Spreader	The DRIX1333LRQ upgrades are load reduced memory modules, which conform to JEDEC's DDR3, PC3-10600L standard. The assemblies are Quad-Rank. One 2K-bit EEPROM is used for Serial Presence Detect and an Isolation Memory Buffer, which enables higher system memory bandwidth at DDR3 speeds up to 1333 MT/s.

Dataram Product	IBM Product	Product Description
DRIX1333LRQ/16GB	49Y1567	1 x 16GB 4Rx4 PC3L-10600L-9-11-C1
DRIX1333LRQ/32GB	90Y3105	1 x 32GB 4Rx4 PC3L-10600L-9-11-C1

Notes

Tolerances on all dimensions except where otherwise indicated are ±.13 (.005).

All dimensions are expressed in millimeters [inches]

Front view

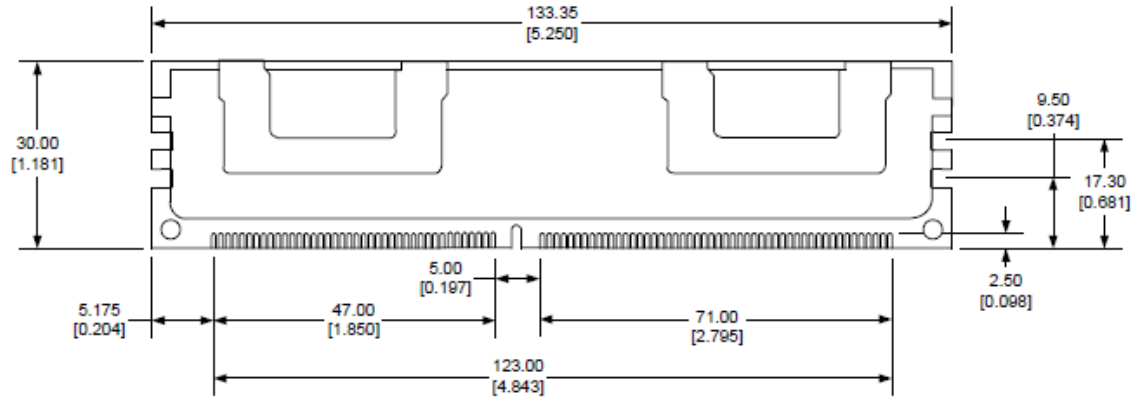

Copyright © 2012 Dataram Corporation | U.S.A. Headquarters +1 609-799-0071 | Offices in Europe and Asia | www.dataram.com

The information contained in this document has been carefully checked and is believed to be reliable and accurate. However, Dataram assumes no responsibility for errors.